

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 643 258 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**15.07.1998 Bulletin 1998/29**

(51) Int Cl.<sup>6</sup>: **F21V 7/09**

(21) Application number: **94202596.6**

(22) Date of filing: **09.09.1994**

(54) **Luminaire**

Leuchte

Luminaire

(84) Designated Contracting States:  
**AT BE DE ES FR GB IT NL**

(30) Priority: **13.09.1993 BE 9300958**  
**11.03.1994 EP 94200635**

(43) Date of publication of application:  
**15.03.1995 Bulletin 1995/11**

(73) Proprietor: **PHILIPS ELECTRONICS N.V.**  
**5621 BA Eindhoven (NL)**

(72) Inventor: **Wijbenga, Hendrik**  
**NL-5656 AA Eindhoven (NL)**

(74) Representative: **van der Veer, Johannes Leendert**  
**International Octroolbureau B.V.,**  
**Prof. Holstlaan 6**  
**5656 AA Eindhoven (NL)**

(56) References cited:  
**EP-A- 0 084 934** **DE-A- 2 442 141**  
**DE-A- 2 707 143** **US-A- 4 087 682**  
**US-A- 4 929 863**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Printed by Jouve, 75001 PARIS (FR)

**EP 0 643 258 B1**

**BEST AVAILABLE COPY**

## Description

The invention relates to a luminaire comprising:

a concave reflector having an optical axis, an optical centre on said axis, a light emission window, and a reflecting surface which surrounds the optical axis, is built up from plane facets, and has a plane of symmetry, which facets

are arranged in rows which each extend to the light emission window between first planes, and in addition

are bounded by second planes which are substantially parallel to one another and transverse to the first planes;

means for accommodating an electric light source inside the reflector in a plane transverse to the plane of symmetry and in the optical centre.

Such a luminaire is known from US 4,929,863.

The known luminaire is rotationally symmetrical and suitable for forming a narrow beam from the light generated by an electric lamp with a comparatively short light source. The luminaire may thus be used for illuminating buildings with a height of 100 m or more, such as towers. The known luminaire may also be used for lighting large areas, such as sports stadiums, in that luminaires are positioned along the circumference. Because of the narrow beam, the luminaires do have to be placed on comparatively high masts of, for example, 50 m or more.

The plane facets in the known luminaire are arranged not only in rows which extend to the light emission window while being bounded by first planes, but also in continuous circumferential bands which are bounded by parallel second planes which are perpendicular to the axis of the reflector.

It is a limitation of the known luminaire that only a small portion of an object positioned at a comparatively small distance from the luminaire can be illuminated owing to the narrowness of the beam, and only with a very high local illuminance, too high for many applications.

It is an object of the invention to provide a luminaire of the kind described in the opening paragraph which is compact and suitable for providing a homogeneous and comparatively wide light beam.

According to the invention, this object is achieved in that

the first planes are mutually substantially parallel and substantially parallel to the plane of symmetry, and  
the second planes are substantially parallel to the optical axis.

The luminaire forms a comparatively wide homoge-

neous beam of the order of 30 to 45° in directions transverse to the plane of symmetry, also called "horizontal directions" hereinafter. This width is twice to three times as large as the width in the plane of symmetry, also called "vertical direction" hereinafter. When the luminaire is fitted with a lamp having a light source of high power, for example 1500-2000 W, it will as a result be highly suitable for illuminating areas such as sports grounds, such as, for example, (soccer) football grounds and racecourses, from masts of comparatively small height, for example 25 to 35 m. However, when a reflector of a given dimension has comparatively few comparatively large facets, it can be used in conjunction with a light source of the same power for the same application at a smaller height of, for example, 15 to 25 m. Alternatively, however, the luminaire may accommodate a light source of lower power such as, for example, 400 to 1000 W, and be used from smaller heights of, for example, 10 to 20 m for interior lighting, for example, for lighting indoor sports halls for various applications. Light sources of comparatively low power, such as 100 W or less, may also be used in a luminaire of dimensions adapted to this light source. The luminaire may then be used, for example, for indoor lighting, for example in halls or rooms, for example office rooms.

It is an advantage of the luminaire according to the invention that a given individual luminaire is capable of accommodating a very wide range of light sources of widely differing dimensions of the light source transverse to the plane of symmetry without the beam-forming properties being substantially impaired. On the other hand, a light source may be used in luminaires of different dimensions.

In contrast to the known luminaire, whose reflector resembles a spider's web owing to its facets when viewed axially, the reflector of the luminaire according to the invention, when viewed axially, displays a pattern of substantially rectangular planes, except at the light emission window. In contrast to the known reflector, the first planes are not radial but parallel to one another and also parallel to the plane of symmetry, while the second planes are not perpendicular to, but parallel to the optical axis.

The reflector has points of intersection with the second planes in the plane of symmetry. In a favourable embodiment, these points of intersection lie on a curve having an axis and a focus in the optical centre, for example, on a parabola. The points of intersection may then lie at a first side of the optical axis on a first curve, for example on a branch of a first parabola, and at the other side of the optical axis on a second curve different from the first, for example on a branch of another parabola, for example a parabola having a focus and a greater focal distance, said focus coinciding substantially with the optical centre. That portion of the reflector will then give a wider beam. Those skilled in the art may readily adapt the luminaire to the envisaged application through the choice of the curve(s) during design.

At a first side of the optical axis, the points of intersection may lie on a first curve, for example a parabola branch, whose axis encloses an acute angle with the axis of the reflector, and possibly at the other side of the optical axis on a second curve whose axis encloses an acute angle of opposite sign with the axis of the reflector. The width of the beam in mainly vertical direction can be adjusted thereby and the beam may be made asymmetrical.

A favourable property of the luminaire is that double reflections in the luminaire are avoided to a high degree. The luminaire has a high efficiency as a result of this.

It is favourable when the reflector axis intersects a facet at an acute angle in the plane of symmetry, and at right angles in a plane transverse to the plane of symmetry. It is counteracted thereby that the reflector throws back radiation onto the electric lamp. This enhances the reflector efficiency still further. Alternatively, the reflector axis may lie in a second plane so that there is no facet which is intersected by the axis, the axis on the contrary being tangent to two facets. The axis may also lie in a first plane, so that it is tangent to four facets.

In an embodiment of the luminaire having central facets, i.e. facets which are intersected by the plane of symmetry, said central facets may have a dimension transverse to said plane which is equal to or greater than the length of the light source to be accommodated. Such facets may give the light emission window an oval basic shape. Alternatively, the light emission window may have a round basic shape, also in the presence of such central facets.

In an alternative embodiment of the luminaire, the reflector has no central facets. The reflector axis then lies in a first plane.

The reflector may have smaller facets locally, for example in a central region intersected by the axis, than elsewhere, for example around this region. The reflector then has an additional plane, in this region, for example an additional second plane, which does not extend outside this region. Smaller facets in a central region have the result that the light beam formed by the reflector from the light of the lamp has a higher centre value than without these smaller facets.

In a special embodiment, the reflector has in a plane through the axis transverse to the plane of symmetry points of intersection with the first planes which lie on a curve which has a focus substantially in the optical centre, for example on a parabola. The light intensity distribution has a comparatively wide peak region in horizontal planes in this embodiment.

The points of intersection in said plane transverse to the plane of symmetry may, however, be located on two parabola branches which each with their focal point are laterally moved away from the plane of symmetry. Thereby, the reflector can be made wide enough to accommodate a light source which would otherwise not fit into the reflector.

It is also possible that the points of intersection in

said plane transverse to the plane of symmetry are located on two parabola branches having a different focal distance. It is thereby achieved that the reflector generates a light beam which is asymmetric in horizontal directions.

In a favourable embodiment, the facets adjacent the light emission window in the plane of symmetry just cover an angle  $\beta$  measured with the optical centre as the vertex, while the remaining facets in this plane just cover an angle  $\beta \pm 10\%$ . In a modification thereof, the facets adjacent the light emission window in the plane through the optical axis and perpendicular to the plane of symmetry just cover an angle  $\gamma$  with the optical centre as the vertex, while the remaining facets in this plane just cover an angle  $\gamma \pm 10\%$ . The advantage of this embodiment and its modification is that the luminous flux increases in the top portion of the beam formed by the luminaire. The "top portion of the beam" is here understood to mean: all the light radiated at smaller angles to the optical axis than the angle at which half the maximum luminous flux is radiated. A favourable result of this is that fewer luminaires are required for illuminating a given field, or luminaires fitted with lamps of lower power. Another result is that less light is radiated at comparatively great angles to the axis, which light could be unpleasant or dazzling. It is favourable when the facets all cover an identical or substantially identical angle in the plane of symmetry. It is equally favourable when the facets cover an identical or substantially identical angle in the plane through the axis and perpendicular to the plane of symmetry. The values of  $\beta$  and  $\gamma$  vary with the chosen number of facets in the reflector.

The luminaire may be used, for example, in a position in which the plane of symmetry is vertical. It is favourable then to limit the emission of unreflected light above the reflector axis by means of a screen mounted above the axis in the reflector. This screen is positioned transversely to the plane of symmetry, at a distance from the optical axis. It may be light-absorbing at its side facing away from the axis and reflecting at its side facing the axis. Depending on the inclination of the reflector, the screen may even substantially prevent radiation above the horizontal plane.

The luminaire may accommodate an electric discharge lamp, for example a high-pressure discharge lamp with, for example, rare gas, mercury and metal halides, in which the light source is a discharge path between electrodes, but alternatively an incandescent lamp such as, for example, a halogen incandescent lamp, in which the light source is a filament. The lamp may be entirely inside the reflector. It is favourable, however, to have the lamp project through the reflector, so that the free ends of its current supply conductors are in a comparatively cold spot outside the reflector where they are less subject to corrosion. The efficiency may also benefit from this because in this case the means for accommodating the light source inside the reflector, such as a lampholder, cannot intercept light.

The reflector may be separable in the plane transverse to the plane of symmetry in which the lamp can be accommodated. This facilitates lamp insertion.

The reflector may be accommodated in a housing which may be closed off with a glass plate. Alternatively, however, the reflector itself may be, or may be a portion of, the outside of the luminaire.

It is also possible for an electric light source to be permanently incorporated in the means for accommodating a light source inside the reflector. The photometric properties of the luminaire in fact remain unaffected thereby.

Embodiments of the luminaire according to the invention are shown in the drawing, in which

Fig. 1 shows a first embodiment in axial view;  
 Fig. 2 is a cross-section of the reflector taken on II-II in Fig. 1;  
 Fig. 3 is a plan view of the reflector according to III in Fig. 1;  
 Fig. 4 is a cross-section as in Fig. 2 of an alternative embodiment;  
 Fig. 5 is the light distribution diagram of the first embodiment, measured in the plane of Fig. 2;  
 Fig. 6 is the light distribution diagram of the first embodiment measured in a plane through the axis 2 and perpendicular to the plane of Fig. 2;  
 Fig. 7 is the light distribution diagram of the first embodiment with a different light source, measured in the plane of Fig. 2;  
 Fig. 8 is the light distribution diagram of the first embodiment with the same light source as in Fig. 7, measured in a plane through the axis 2 and perpendicular to the plane of Fig. 2;  
 Fig. 9 is an axial elevation of a further embodiment of the reflector;  
 Figs. 10 and 11 are elevations taken on X and XI in Fig. 9;  
 Fig. 12 is the light distribution diagram in the plane of drawing of Fig. 10;  
 Fig. 13 is the light distribution diagram in the plane of drawing of Fig. 11;  
 Fig. 14 is an axial elevation of a further embodiment of a reflector;  
 Figs. 15 and 16 are side elevations taken on XV and XVI in Fig. 14;  
 Fig. 17 shows the reflector of Fig. 14 in perspective view; and  
 Figs. 18 and 19 are light distribution diagrams obtained with a lamp in the reflector of Fig. 14, in the plane of Fig. 15 and of Fig. 16, respectively.

The luminaire of Figs. 1, 2 and 3 comprises a concave reflector 1 with an optical axis 2, an optical centre 2' on the axis, a light emission window 3 and a reflecting surface 5 surrounding the optical axis, built up from plane facets 4 and having a plane of symmetry 6. The facets are arranged in rows 7 which each extend between first planes 8 towards the light emission window

3. The facets are also bounded by second planes 9 which are mutually substantially parallel and transverse to the first planes 8.

The luminaire comprises means 30 for holding an electric light source 31' inside the reflector in a plane transverse to the plane of symmetry 6 and in the optical centre 2'. In the embodiment drawn, these means are formed by two lampholders which can each accommodate a lamp cap of a double-capped electric lamp. Alternative embodiments, however, may be designed for the use of a single-capped lamp.

The first planes 8 are mutually substantially parallel, and substantially parallel to the plane of symmetry 6. The second planes 9 are substantially parallel to the optical axis 2. The luminaire drawn has a housing 15. The light emission window 3 in the embodiment shown has an oval basic shape with its greatest diameter transverse to the plane of symmetry.

In the plane of symmetry 6, the reflector 1 has points of intersection 41 (Fig. 2) with the second planes 9. These points lie on a curve 411 having an axis 412 and a focus 413 which coincides substantially with the optical centre 2' of the reflector. This curve is not drawn in the Figure since it would run very closely alongside the facets given the scale used and would render the drawing less clear.

In the plane of symmetry 6 (Fig. 2) at a first side 10 of the optical axis 2, the reflector 1 has points of intersection 41 with the second planes 9, which points lie on a first curve 411, in the Figure on a branch of a parabola with  $y^2 = 4 \cdot 50.5x$ , and at the other side 11 of the optical axis 2 points of intersection 42 with the second planes 9, which points lie on a second curve 421 with an axis 422 and a focus 423 different from the first curve 411. The second curve in the Figure is a branch of a parabola with  $y^2 = 4 \cdot 51.5x$ . The focus coincides substantially with the optical centre.

The axis 2 of the reflector 1 intersects a facet 40 at an acute angle in the plane of symmetry 6 (Fig. 2) and at right angles in a plane transverse to the plane of symmetry (Fig. 3).

The drawn reflector 1 is tangent to a parabola 20, in the Figure with  $y^2 = 4 \cdot 62.5x$ , in a plane through the axis 2 and transverse to the plane of symmetry 6 (Fig. 3). In the embodiment shown, the focuses of the parabolas coincide or substantially coincide.

Within the circle in Fig. 2 which indicates the contours of the electric high-pressure discharge lamp 31 to be accommodated, a smaller circle 31' is shown which represents the light source of the lamp, i.e. the discharge arc. This arc is shifted away from the centre of the lamp 31 owing to convection flows during operation. The Figure shows the position of the arc when the axis 2 encloses an angle  $\alpha$  of  $65^\circ$  with the vertical V. The arc 31' is then perpendicularly above the centreline (not shown) of the lamp 31. The arc thus passes through the optical centre. Said angle  $\alpha$  is the average of the inclination angles for which the luminaire drawn was de-

signed. For illumination of a field immediately below the suspension point of the luminaire, a smaller angle  $\alpha$  will be set, and a greater one for a field further removed. Light ray  $a$  is the ray with the highest direction which can leave the luminaire without previous reflection on the reflector, because a screen 50 is present in the reflector (see also Figs. 1 and 3). The ray remains below the horizontal  $H$  in the envisaged operational position of the luminaire. As a result, the luminaire causes little or no stray light.

In Fig. 4, the facets  $4'$  in the plane of symmetry 6 at a first side 10 of the optical axis 2 have points of intersection  $41'$  with the second planes 9, which points lie on a first curve  $411'$ . The axis  $412'$  thereof encloses an acute angle with the axis 2 of the reflector 1. The facets  $4'$  at the other side 11 of the optical axis have points of intersection  $42'$  with the second planes 9, which points lie on a second curve  $421'$  whose axis  $422'$  encloses an acute angle of opposite sign with the axis 2 of the reflector.

The focuses  $413'$ ,  $423'$  substantially coincide in the optical centre  $2'$ .

The luminaire of Figs. 1-3 was used with a 2 kW metal halide discharge lamp with a discharge arc of 110 mm length, i.e. a length corresponding to the width of the facets through the plane of symmetry. Figs. 5 and 6 show the measured distribution of the light intensity of the luminaire. Fig. 5 shows that the maximum light intensity is obtained at an angle of  $65^\circ$  to the vertical. Substantially no light is emitted horizontally ( $90^\circ$  to the vertical). The distribution is symmetrical up to the smaller angles to the vertical, where the screen 50 (Fig. 2) adds light to the beam which would otherwise be lost to the given application, ground illumination, because it would be radiated upwards. The screen may be omitted in the application for, for example, the illumination of wide buildings of small height. The beam has a width of  $2 \times 7.5^\circ$  in the vertical plane at the area of half its maximum intensity.

Fig. 6 shows the light intensity distribution in the horizontal plane through the axis of the luminaire. The horizontal beam width is  $2 \times 22^\circ$ , three times that of the vertical.

A field of  $68 \times 105 \text{ m}^2$  was illuminated from four masts of 32 m height, each mast carrying ten luminaires as shown in Figs. 1-3, each containing a 2 kW metal halide lamp and provided with a front plate with wire mesh. The illumination values of Table 1 were obtained in that the luminaires were aimed at different positions.

Table 1

$\bar{E}$ (lx)	$E_{\min}/E_{\max}$	$E_{\min}/\bar{E}$
420	0.85	0.94
460	0.67	0.8
480	0.55	0.72

In the Table,  $\bar{E}$  is the average,  $E_{\max}$  the maximum, and  $E_{\min}$  the minimum illuminance.

The Table shows that a high average illuminance  $\bar{E}$  of 420 lux is obtained with a very high homogeneity: high ratios in the second and the third column. Even a 10% higher illuminance  $\bar{E}$  of 460 lx can be realised with a homogeneity which is very acceptable in practice. The third row of numbers in the Table shows how great the flexibility is in the design of a lighting installation in which the luminaire according to the invention is used. Even at a 15% higher average illuminance than the first one a reasonable homogeneity is still achieved which satisfies the recommendations valid internationally for sports grounds.

The luminaire shown has a high efficiency of 80% in spite of the use of a front plate with metal wire mesh. The reflector was made from specularly reflecting anodized aluminium with a reflectivity of 0.86, i.e. 86% of the incident light is reflected. The light loss owing to absorption by the reflector in this luminaire is 9% of the generated light. Reflections and absorption caused by the front plate leads to a light loss of approximately 8% of the quantity of incident light. Furthermore, the wire mesh accounts for approximately 4.5% loss of the light issuing through the front plate. This clearly shows that, since the luminaire efficiency is 80%, multiple reflections inside the luminaire, which would give additional losses, are avoided to a high degree.

The light distributions of Figs. 7 and 8 were obtained with an 1800 W discharge lamp having an arc of 25 mm length as the light source, i.e. a length corresponding to less than one quarter the width of the facets through the plane of symmetry. The vertical beam width is  $2 \times 8^\circ$ , the horizontal beam width  $2 \times 21^\circ$ . The efficiency of the luminaire is 80% again, also with this light source which is much shorter than the former one.

The horizontal beam width obtained with this light source of small horizontal dimension compared with the horizontal beam width in the same reflector obtained with the said much longer light source with a horizontal dimension of 110 mm illustrates the light-spreading effect of the plane facets. A relative enlargement of the facets relative to the light source leads to a widening of the beam.

In Figs. 9, 10 and 11, parts of the reflector 51 corresponding to parts in Figs. 1, 2 and 3 have reference numerals which are 50 higher than in the latter Figures.

The optical axis 52 of this reflector lies in a second plane 59, so that there is no facet which is intersected perpendicularly by the axis, and also in a first plane 58. As a result, there are four facets tangent to the axis. Within a region 55' intersected by the optical axis, the reflector shown has additional planes, in the Figure two additional planes 59', which each extend over two rows 55' 57. Smaller facets 54' have been formed thereby.

The reflector is separable in the plane 62 transverse to the plane of symmetry 56 in which the lamp can be accommodated. The light emission window 53 of the re-

flector is of substantially equal width in directions transverse to one another and thus has a substantially round basic shape.

In the plane of symmetry 56, the reflector 51 is tangent to a parabola 461 with an axis 462 and a focus 463 in the optical centre 52', and in a plane through the axis 52 and transverse to the plane of symmetry to a curve, in the Fig. a parabola 70, with a focus which coincides substantially with the optical centre.

A high-pressure discharge lamp with a discharge arc of 25 mm length was accommodated in a luminaire provided with the reflector 51 with a screen 100 present therein. The lamp consumed a power of 1775 W. The light distribution of the light beam formed by the luminaire was measured with the luminaire enclosing an angle of 45° with the vertical. It is apparent from Fig. 12 that the beam has a width of 18.5° in the plane of symmetry, and from Fig. 13 that it has a width of 45° in the plane through the axis and perpendicular to the plane of symmetry.

The luminaire has an efficiency of 80%.

A 250 W high-pressure discharge lamp with a discharge arc of 27 mm length was used in a luminaire which had only 0.7 time the size of the former luminaire and a light emission window of only 28 cm in diameter. The luminaire created a light beam containing 80% of the light generated by this lamp with its comparatively great arc length.

In Figs. 14 - 17, components corresponding to those of Fig. 1 have reference numerals which are 100 higher. The luminaire reflector shown has facets 104' adjacent the light emission window 103 in the plane of symmetry 106. The reflector has facets 104" adjacent the light emission window 103 in the plane through the axis 102 and perpendicular to the plane of symmetry 106. The remaining facets of the reflector have been referenced 104. In the plane of symmetry 106, as is the case in Fig. 10, the reflector is tangent to a parabola whose focus lies in the optical centre 102' (Fig. 15). The reflector is also tangent to a parabola in the plane through the axis 102 and perpendicular to the plane of symmetry (Fig. 16), as is the reflector of Fig. 11, which parabola has its focus in the optical centre.

The facets 104' (Fig. 15) just cover an angle  $\beta$  with a vertex in the optical centre 102'. The other facets 104 in this plane just cover an angle  $\beta \pm 10\%$ , in the Fig. exactly the angle  $\beta$ .

The facets 104" (Fig. 16) just cover an angle  $\gamma$  with a vertex in the optical centre 102', the other facets 104 in this plane just an angle  $\gamma \pm 10\%$ . In the Figure, these facets again just cover the angle  $\gamma$ .

A luminaire with this reflector was provided with the high-pressure discharge lamp mentioned above with a discharge arc of 25 mm and a power of 1775 W. The luminaire was closed off with a glass plate with a metal wire grating. The light distribution in the beam generated by the lamp and the luminaire is shown in Figs. 18 and 19, the luminaire being pointed downwards with its op-

tical axis at an angle of 45° to the perpendicular.

In the plane of symmetry (Fig. 18), the vertical plane, the beam has a maximum luminous intensity  $I_{\max}$  of 5260 cd/klm for a half-value width, i.e. the angle between the directions in which 0.5  $I_{\max}$  is emitted, of 13.6°, the vertex being in the optical centre. The flanks of the curve are steep and the base is low, higher in the case of the smaller angles than in the case of the greater angles owing to the presence of the screen 150 whereby the field to be illuminated receives extra light which would otherwise be lost for useful purposes. The low luminous intensity at greater angles demonstrates the low glare risk. The beam has a width of 30° in the plane through the axis and perpendicular to the plane of symmetry. Apart from the effect of the screen 150, the beam has a high degree of symmetry. The efficiency of the luminaire is 80%.

## 20 Claims

### 1. A luminaire comprising:

a concave reflector (1) having an optical axis (2), an optical centre (2') on said axis, a light emission window (3), and a reflecting surface (5) which surrounds the optical axis, is built up from plane facets (4), and has a plane of symmetry (6), which facets

are arranged in rows (7) which each extend to the light emission window (3), between first planes (8), and in addition are bounded by second planes (9) which are substantially parallel to one another and transverse to the first planes (8);

means (30) for accommodating an electric light source (31') inside the reflector (1) in a plane transverse to the plane of symmetry (6) and in the optical centre (2'),

characterized in that

the first planes (8) are mutually substantially parallel and substantially parallel to the plane of symmetry (6), and the second planes (9) are substantially parallel to the optical axis (2).

2. A luminaire as claimed in Claim 1, characterized in that in the plane of symmetry (6) the reflector (1) has points of intersection (41) with the second planes (9), which points lie on a curve (411) having an axis (412) and a focus (413), which focus lies in the optical centre (2').

3. A luminaire as claimed in Claim 2, characterized in

that at a first side (10) of the optical axis (2) the points of intersection (41) lie on a first curve (411), and at the other side (11) of the optical axis (2) on a second curve (421) with an axis (422) and a focus (423) which is different from the first curve (411), said focus (423) coinciding substantially with the optical centre (2').

4. A luminaire as claimed in Claim 1 or 2, characterized in that the axis (2) of the reflector (1) intersects a facet (40) at an acute angle in the plane of symmetry (6), and at right angles in a plane transverse to the plane of symmetry. 10
5. A luminaire as claimed in Claim 1 or 2, characterized in that in a plane through the axis (2) and perpendicular to the plane of symmetry (6) the reflector (1) is tangent to a curve (20) which has a focus which coincides substantially with the optical centre (2'). 15 20
6. A luminaire as claimed in Claim 1 or 2, characterized in that the optical axis (52) lies in a second plane (59). 25
7. A luminaire as claimed in Claim 1, 2 or 6, characterized in that the optical axis (52) lies in a first plane (58). 30
8. A luminaire as claimed in Claim 1 or 2, characterized in that the reflector (51) has an additional plane (59') within a region (55') intersected by the optical axis (52). 35
9. A luminaire as claimed in Claim 2, characterized in that the facets (104') adjacent the light emission window (103) in the plane of symmetry (106) just cover an angle  $\beta$  with a vertex in the optical centre (102'), while the other facets (104) in said plane just cover an angle  $\beta \pm 10\%$ . 40
10. A luminaire as claimed in Claims 5 and 9, characterized in that the facets (104") adjacent the light emission window (103) in the plane through the axis (102) and perpendicular to the plane of symmetry (106) just cover an angle  $\gamma$  with a vertex in the optical centre (102'), while the other facets (104) in said plane just cover an angle  $\gamma \pm 10\%$ . 45
11. A luminaire as claimed in Claim 1 or 2, characterized in that the reflector (51) is separable in the plane (62) transverse to the plane of symmetry (56) in which the lamp can be accommodated in means (80). 50
12. A luminaire as claimed in any one of the preceding Claims, characterized in that a screen (50) is arranged transversely to the plane of symmetry (6) at 55

a distance from the optical axis (2) for restricting the emission of unreflected light.

## 5 Patentansprüche

### 1. Leuchte mit:

einem konkaven Reflektor (1) mit einer optischen Achse (2), einem optischen Zentrum (2') auf der genannten Achse, einem Lichtaustrittsfenster (3) und einer die optische Achse umgebenden, aus ebenen Facetten (4) aufgebauten, reflektierenden Oberfläche (5) mit einer Symmetrieebene (6), wobei diese Facetten

in Reihen (7) angeordnet sind, die sich jeweils zwischen ersten ebenen Flächen (8) zum Lichtaustrittsfenster (3) hin erstrecken und zudem durch zweite ebene Flächen (9) begrenzt werden, die im wesentlichen parallel zueinander und quer zu den ersten ebenen Flächen (8) liegen;

Mitteln (30) zum Aufnehmen einer elektrischen Lichtquelle (31') innerhalb des Reflektors (1) in einer Ebene quer zu der Symmetrieebene (6) und in dem optischen Zentrum (2'),

dadurch gekennzeichnet, daß

die ersten ebenen Flächen (8) im wesentlichen parallel zueinander und im wesentlichen parallel zu der Symmetrieebene (6) liegen und die zweiten ebenen Flächen (9) im wesentlichen parallel zu der optischen Achse (2) liegen.

2. Leuchte nach Anspruch 1, dadurch gekennzeichnet, daß der Reflektor (1) in der Symmetrieebene (6) Schnittpunkte (41) mit den zweiten ebenen Flächen (9) hat, wobei diese Punkte auf einer Kurve (411) mit einer Achse (412) und einem Brennpunkt (413) liegen, welcher Brennpunkt im optischen Zentrum (2') liegt. 40
3. Leuchte nach Anspruch 2, dadurch gekennzeichnet, daß die Schnittpunkte (41) an einer ersten Seite (10) der optischen Achse (2) auf einer ersten Kurve (411) liegen und an der anderen Seite (11) der optischen Achse (2) auf einer zweiten, von der ersten Kurve (411) abweichenden Kurve (421) mit einer Achse (422) und einem Brennpunkt (423) liegen, welcher Brennpunkt (423) im wesentlichen mit dem optischen Zentrum (2') zusammenfällt. 50 55
4. Leuchte nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß die Achse (2) des Reflektors (1) in der

Symmetrieebene (6) eine Facette (40) in einem spitzen Winkel schneidet und rechtwinklig in einer Ebene quer zu der Symmetrieebene.

5. Leuchte nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß der Reflektor (1) in einer Ebene durch die Achse (2) und senkrecht zu der Symmetrieebene (6) eine Kurve (20) berührt, die einen Brennpunkt hat, der nahezu mit dem optischen Zentrum (2') zusammenfällt. 5 10
6. Leuchte nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß die optische Achse (52) in einer zweiten ebenen Fläche (59) liegt. 15
7. Leuchte nach Anspruch 1, 2 oder 6, dadurch gekennzeichnet, daß die optische Achse (52) in einer ersten ebenen Fläche (58) liegt. 20
8. Leuchte nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß der Reflektor (51) innerhalb eines Bereiches (55'), der von der optischen Achse (52) durchschnitten wird, eine zusätzliche ebene Fläche (59') hat. 25
9. Leuchte nach Anspruch 2, dadurch gekennzeichnet, daß die dem Lichtaustrittsfenster (103) benachbarten Facetten (104') in der Symmetrieebene (106) genau einen Winkel  $\beta$  mit einem Scheitelpunkt im optischen Zentrum (102') überdecken, während die anderen Facetten (104) in der genannten Ebene genau einen Winkel  $\beta \pm 10\%$  überdecken. 30
10. Leuchte nach Anspruch 5 und 9, dadurch gekennzeichnet, daß die dem Lichtaustrittsfenster (103) benachbarten Facetten (104'') in der Ebene durch die Achse (102) und senkrecht zur Symmetrieebene (106) genau einen Winkel  $\gamma$  mit einem Scheitelpunkt im optischen Zentrum (102') überdecken, während die anderen Facetten (104) in der genannten Ebene genau einen Winkel  $\gamma \pm 10\%$  überdecken. 35 40
11. Leuchte nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß der Reflektor (51) in der Ebene (62) quer zu der Symmetrieebene (56), in der die Lampe in Mittel (80) aufgenommen werden kann, teilbar ist. 45
12. Leuchte nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß zum Begrenzen der Emission von nicht reflektiertem Licht eine Abschirmung (50) in einem Abstand von der optischen Achse (2) quer zur Symmetrieebene (56) angeordnet ist. 50 55

## Revendications

### 1. Appareil d'éclairage comportant:

un réflecteur concave (1) présentant un axe optique (2), un centre optique (2') situé sur ledit axe, une fenêtre de sortie de lumière (3) et une surface réfléchissante (5) entourant l'axe optique, constituée de facettes planes (4) et présentant un plan de symétrie (6), lesdites facettes étant ordonnées en rangées (7) s'étendant chacune entre des premiers plans (8) vers la fenêtre de sortie de lumière (3) et en outre étant limitées par des deuxièmes plans (9) s'étendant sensiblement de façon mutuellement parallèle et transversalement aux premiers plans (8), des moyens (30) pour recevoir à l'intérieur du réflecteur une source lumineuse électrique (31') dans un plan s'étendant transversalement au plan de symétrie (6) et dans le centre optique (2'),

caractérisé en ce que

les premiers plans (8) s'étendent sensiblement de façon mutuellement parallèle et de façon sensiblement parallèle au plan de symétrie (6), et en ce que les deuxièmes plans (9) s'étendent de façon sensiblement parallèle à l'axe optique (2).

2. Appareil d'éclairage selon la revendication 1, caractérisé en ce que dans le plan de symétrie (6) le réflecteur (1) présente des points d'intersection (41) avec les deuxièmes plans (9), lesdits points se situant sur une courbe (411) présentant un axe (412) et un foyer (413), ledit foyer se situant dans le centre optique (2').

3. Appareil d'éclairage selon la revendication 2, caractérisé en ce que d'un premier côté (10) de l'axe optique (2) les points d'intersection (41) se situent sur une première courbe (411) et en ce que de l'autre côté (11) de l'axe optique (2) ils se situent sur une deuxième courbe (421) présentant un axe (422) et un foyer (423) qui est différent de la première courbe (411), ledit foyer (423) coïncidant sensiblement avec le centre optique (2').

4. Appareil d'éclairage selon la revendication 1 ou 2, caractérisé en ce que l'axe (2) du réflecteur (1) rencontre une facette (40) sous un angle aigu dans le plan de symétrie (6) et perpendiculairement dans un plan s'étendant transversalement au plan de symétrie.



5. Appareil d'éclairage selon la revendication 1 ou 2, caractérisé en ce que dans un plan traversant l'axe (2) et s'étendant perpendiculairement au plan de symétrie (6) le réflecteur (1) est tangent à une courbe (20) qui présente un foyer coïncidant sensiblement avec le centre optique (2'). 5
6. Appareil d'éclairage selon la revendication 1 ou 2, caractérisé en ce que l'axe optique (52) se situe dans un deuxième plan (59). 10
7. Appareil d'éclairage selon la revendication 1, 2 ou 6, caractérisé en ce que l'axe optique (52) se situe dans un premier plan (58). 15
8. Appareil d'éclairage selon la revendication 1 ou 2, caractérisé en ce que le réflecteur (51) présente un plan additionnel (59') situé à l'intérieur d'une zone (55') entrecoupée par l'axe optique (52). 20
9. Appareil d'éclairage selon la revendication 2, caractérisé en ce que dans le plan de symétrie (106) les facettes (104') contiguës à la fenêtre de sortie de lumière (103) couvrent justement un angle  $\beta$  présentant un sommet dans le centre optique (102'), alors que dans ledit plan les autres facettes (104) couvrent justement un angle  $\beta \pm 10\%$ . 25
10. Appareil d'éclairage selon les revendications 5 et 9, caractérisé en ce que dans le plan traversant l'axe (102) et s'étendant perpendiculairement au plan de symétrie (106) les facettes (104'') contiguës à la fenêtre de sortie de lumière (103) couvrent justement un angle  $\gamma$  présentant un sommet dans le centre optique (102'), alors que dans ledit plan les autres facettes (104) couvrent justement un angle  $\gamma \pm 10\%$ . 30 35
11. Appareil d'éclairage selon la revendication 1 ou 2, caractérisé en ce que le réflecteur (51) est séparable dans le plan (62) s'étendant transversalement au plan de symétrie (56) dans lequel la lampe peut être reçue dans des moyens (80). 40
12. Appareil d'éclairage selon l'une quelconque des revendications précédentes, caractérisé en ce qu'un écran (50) est disposé transversalement au plan de symétrie (6) à une distance espacée de l'axe optique (2) pour limiter l'émission de lumière non réfléchie. 45 50

55

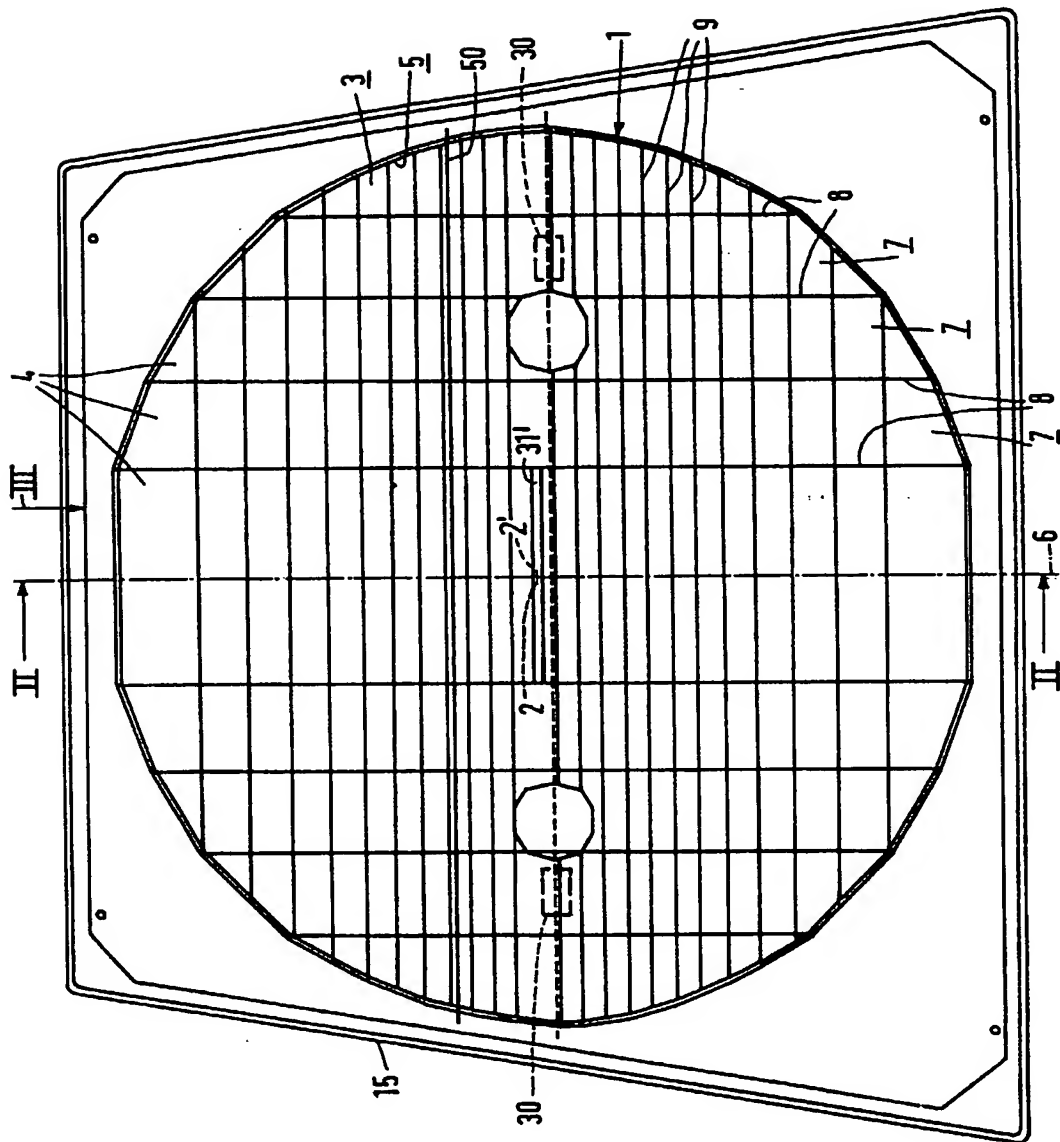


FIG. 1

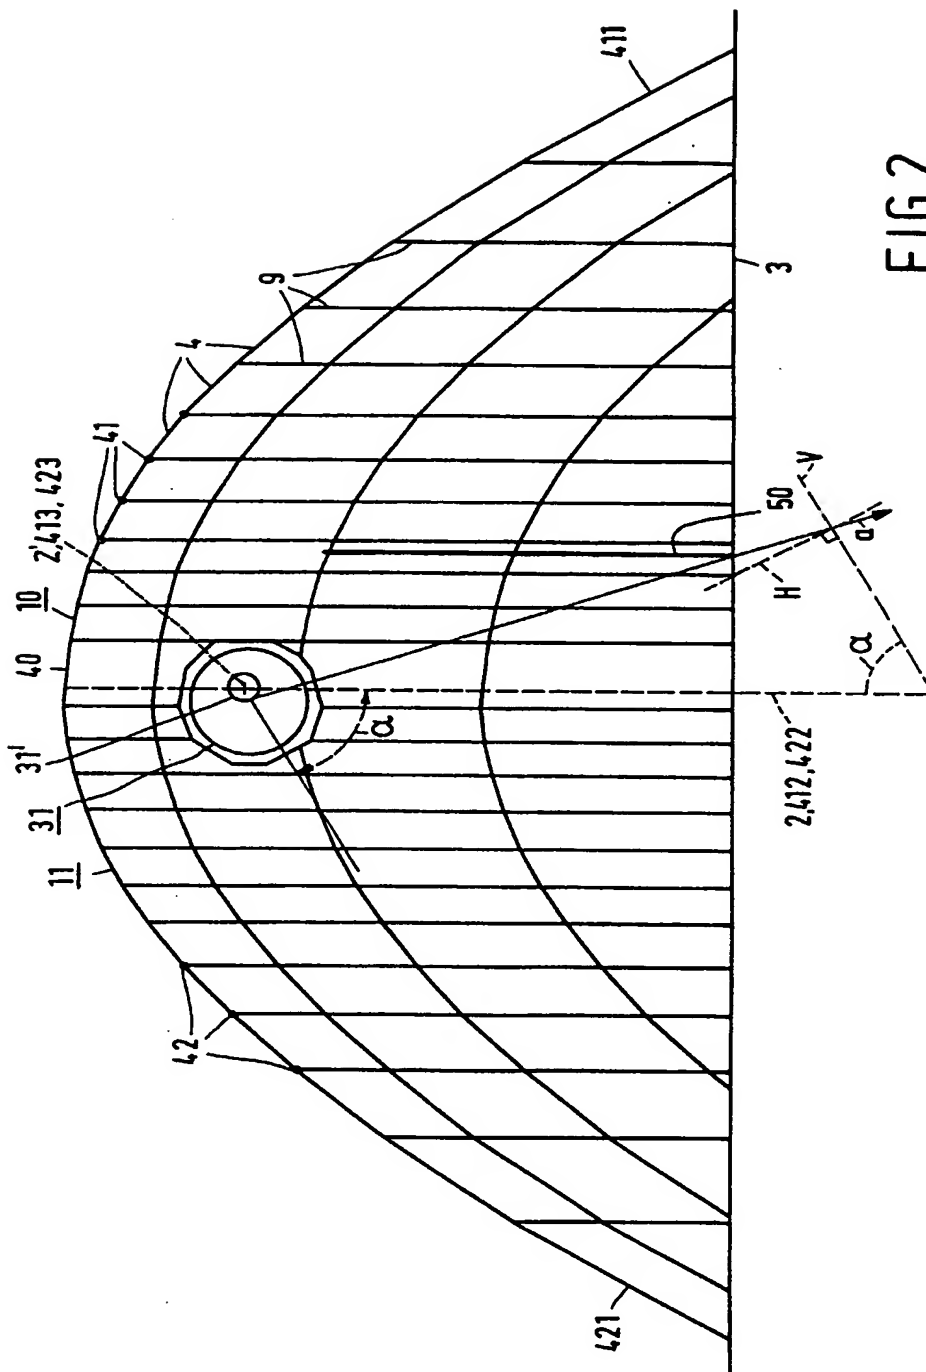


FIG. 2

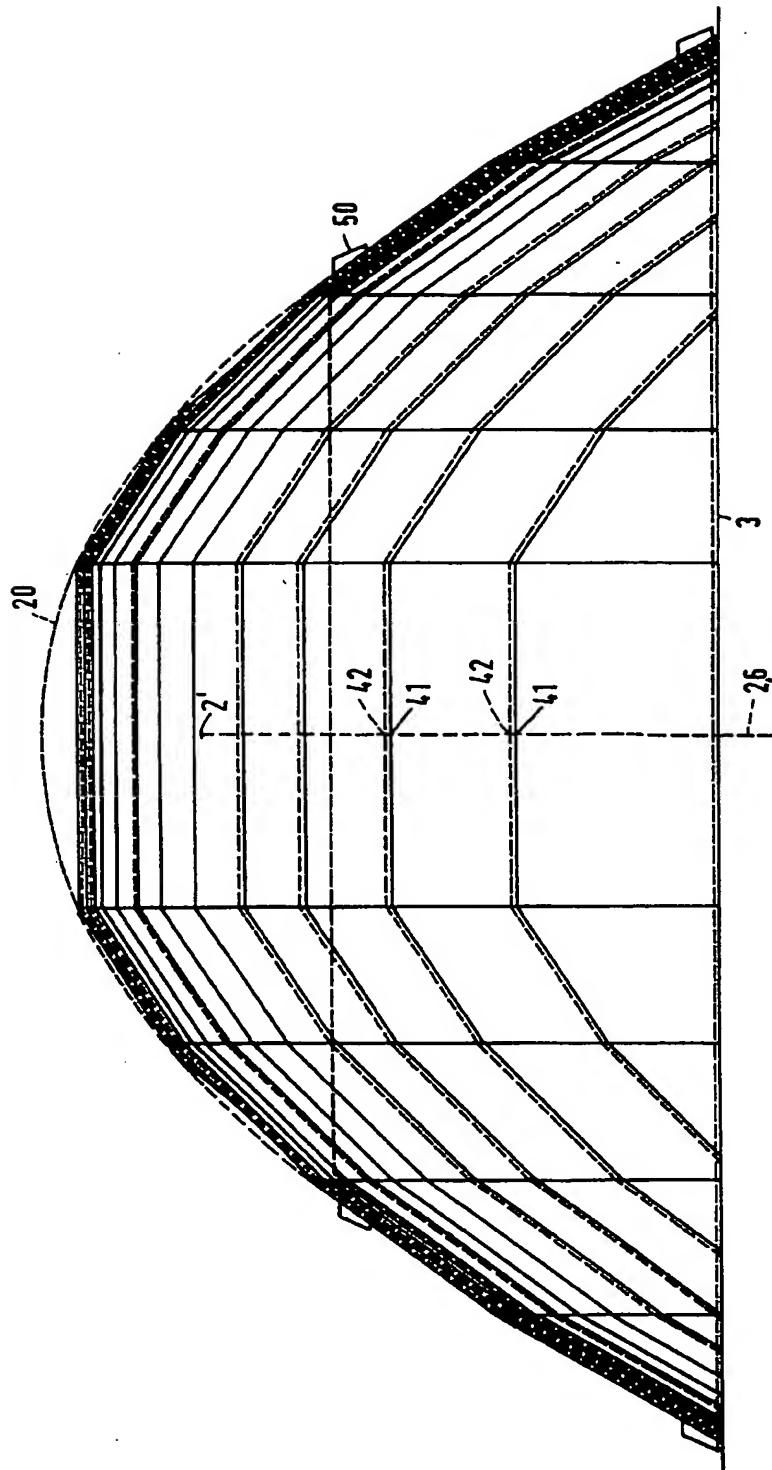


FIG. 3

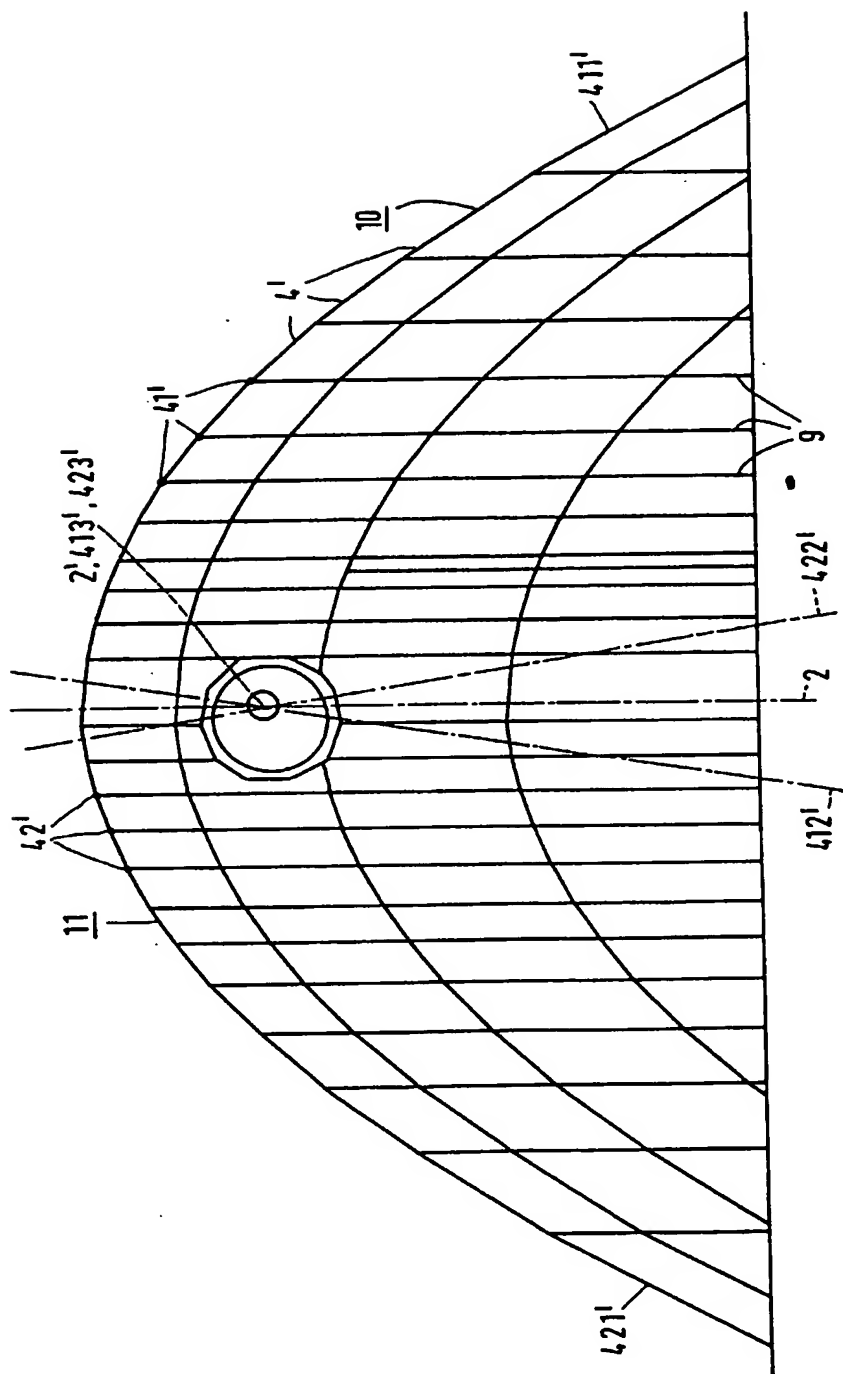
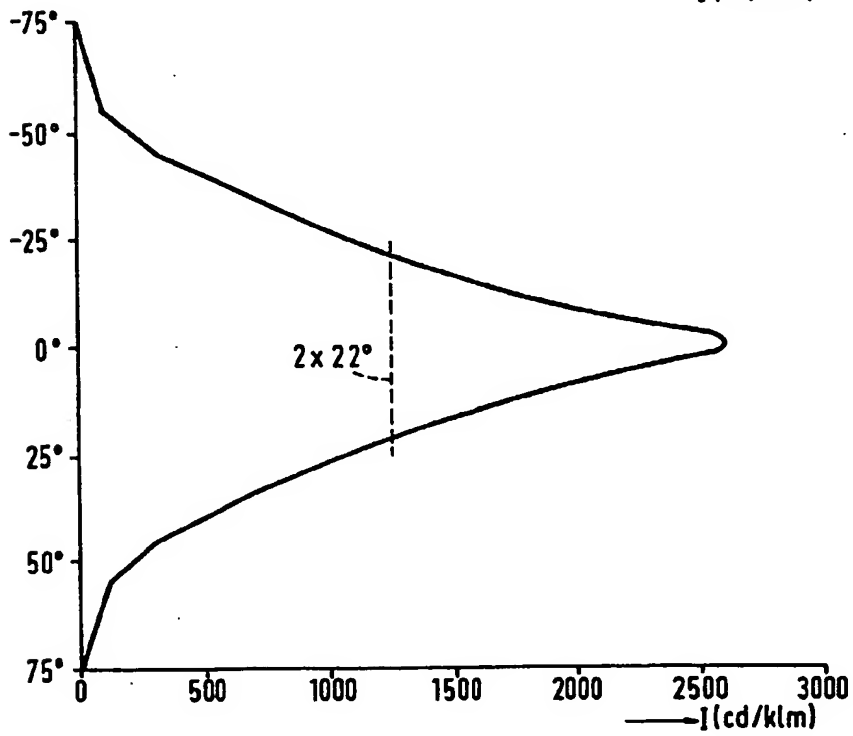
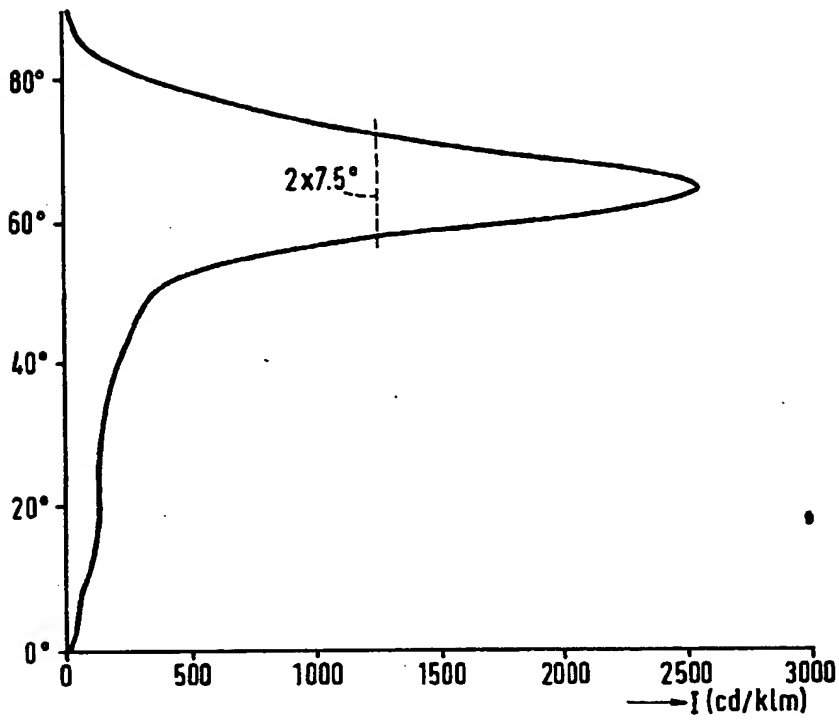
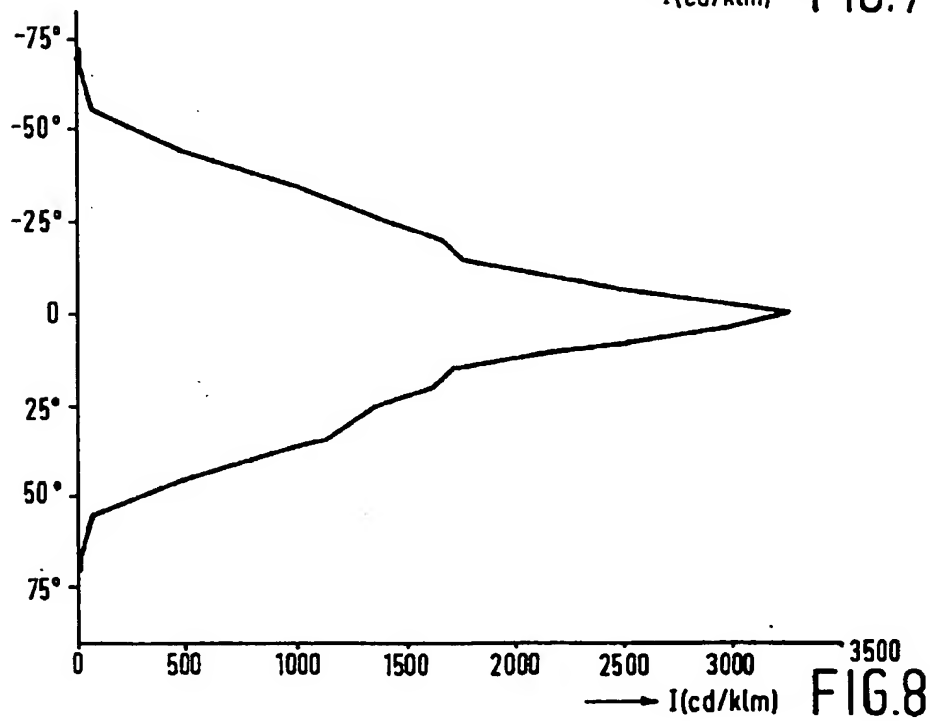
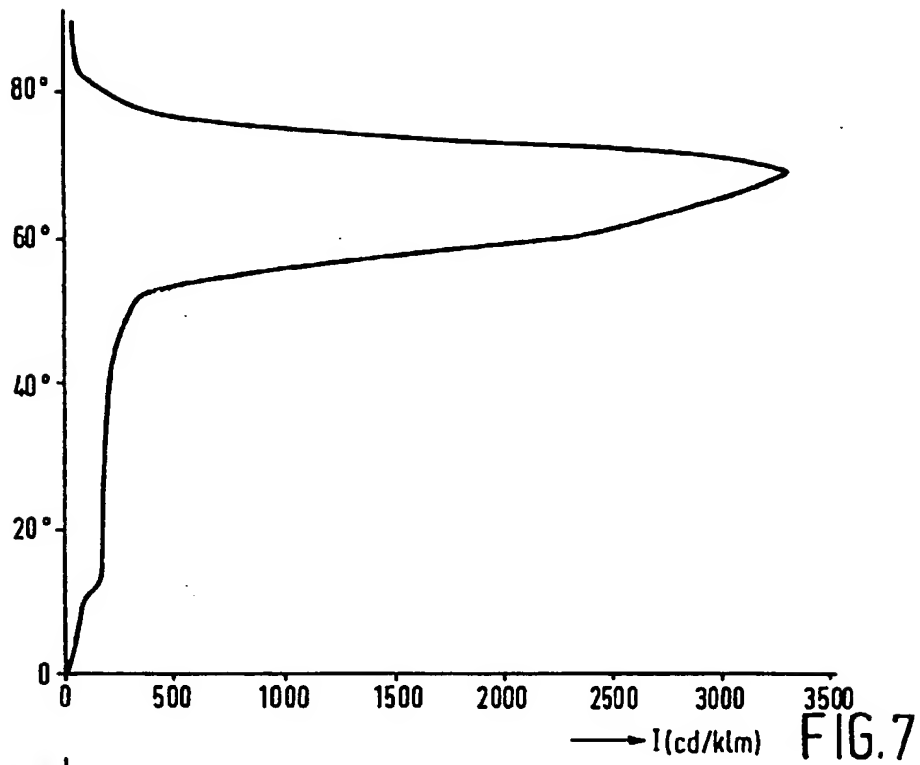


FIG. 4





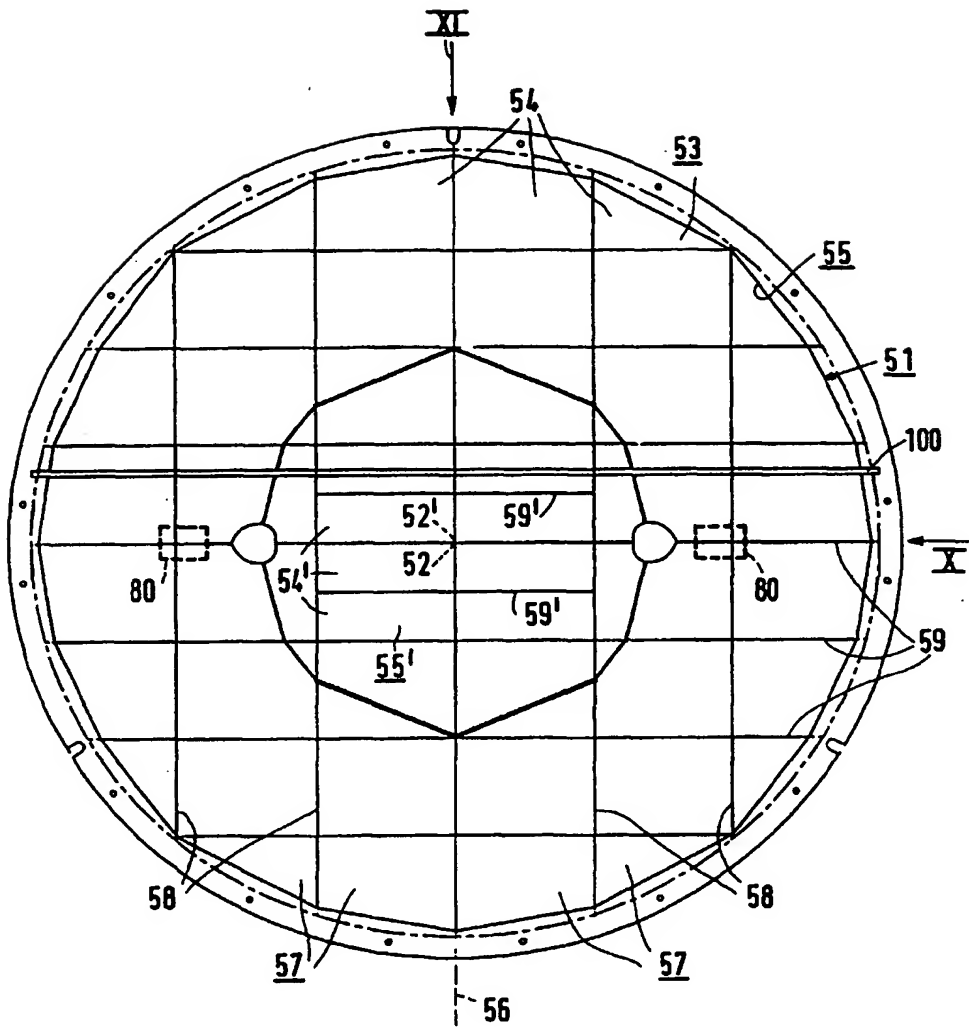


FIG. 9



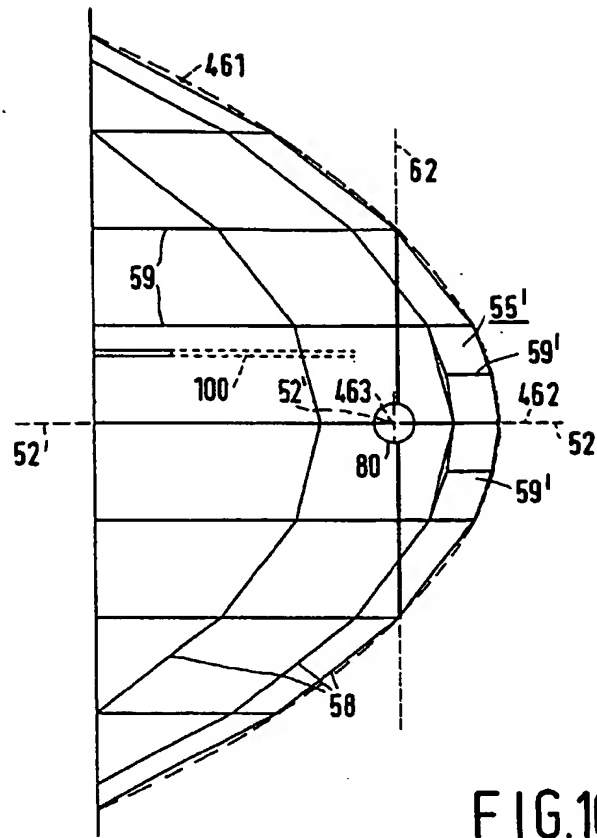


FIG. 10

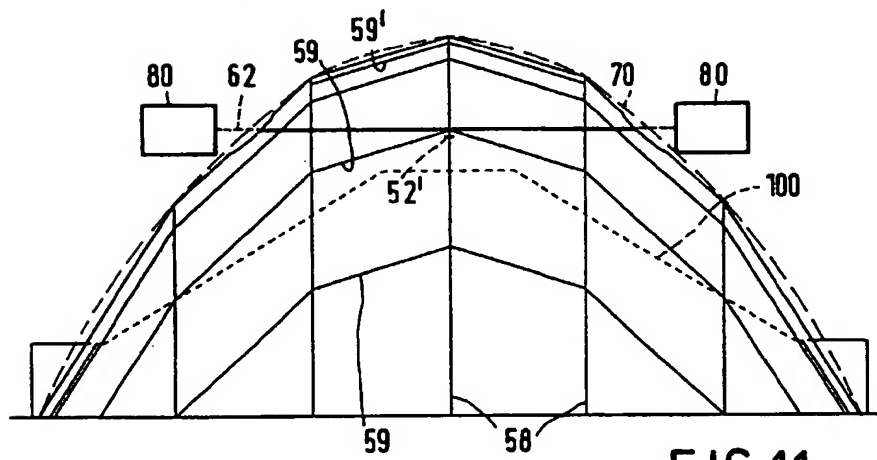


FIG. 11

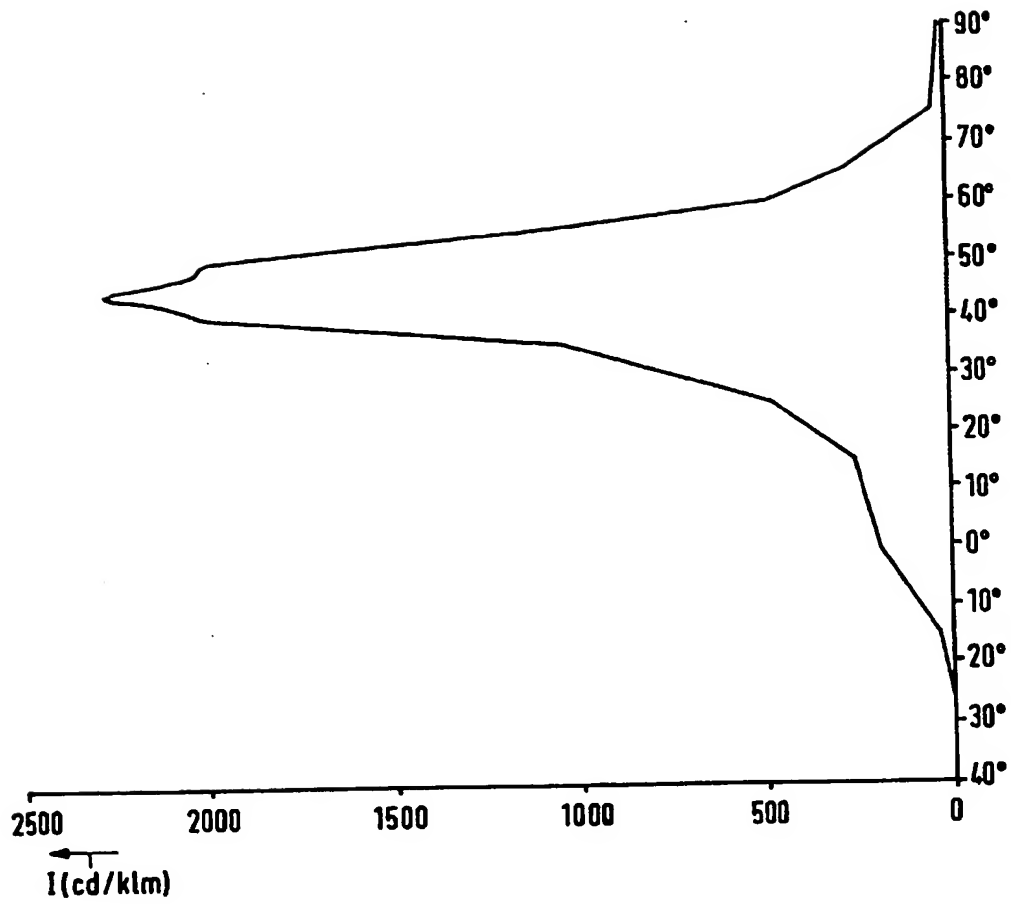


FIG.12

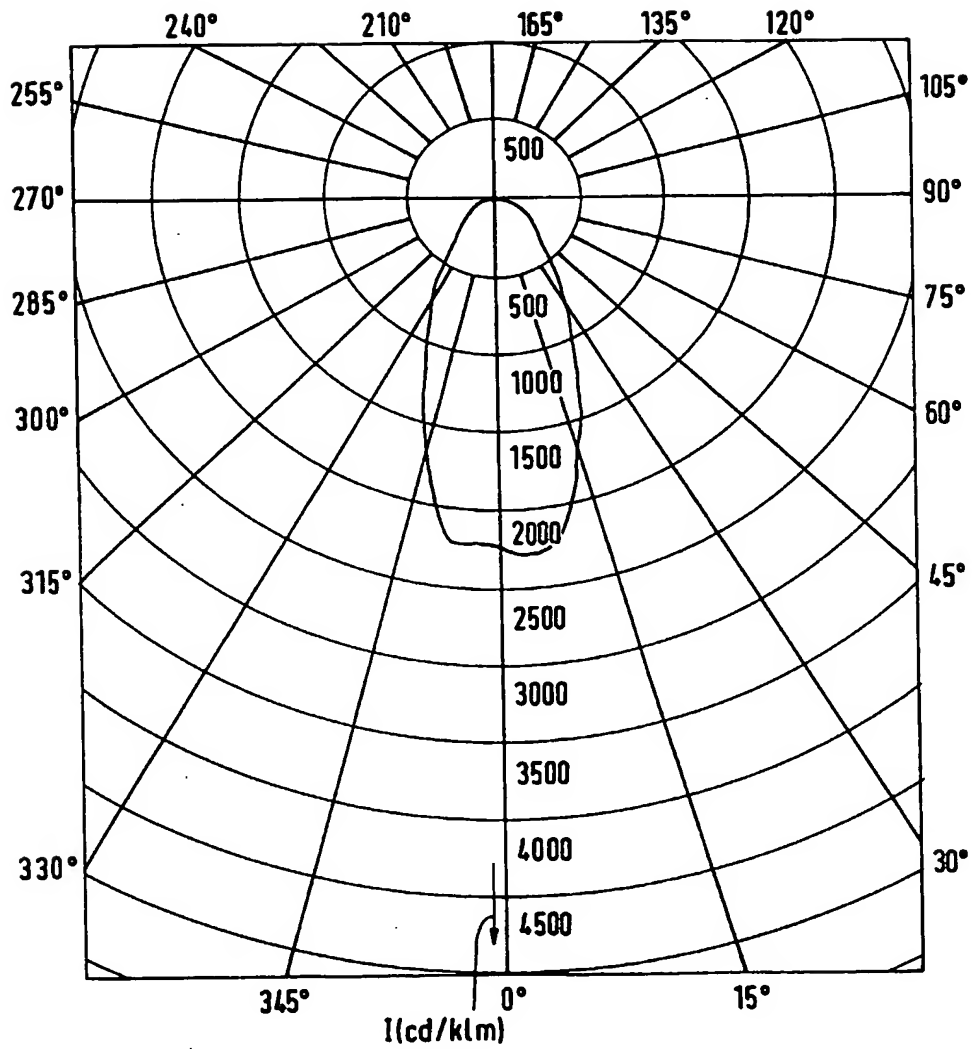


FIG.13

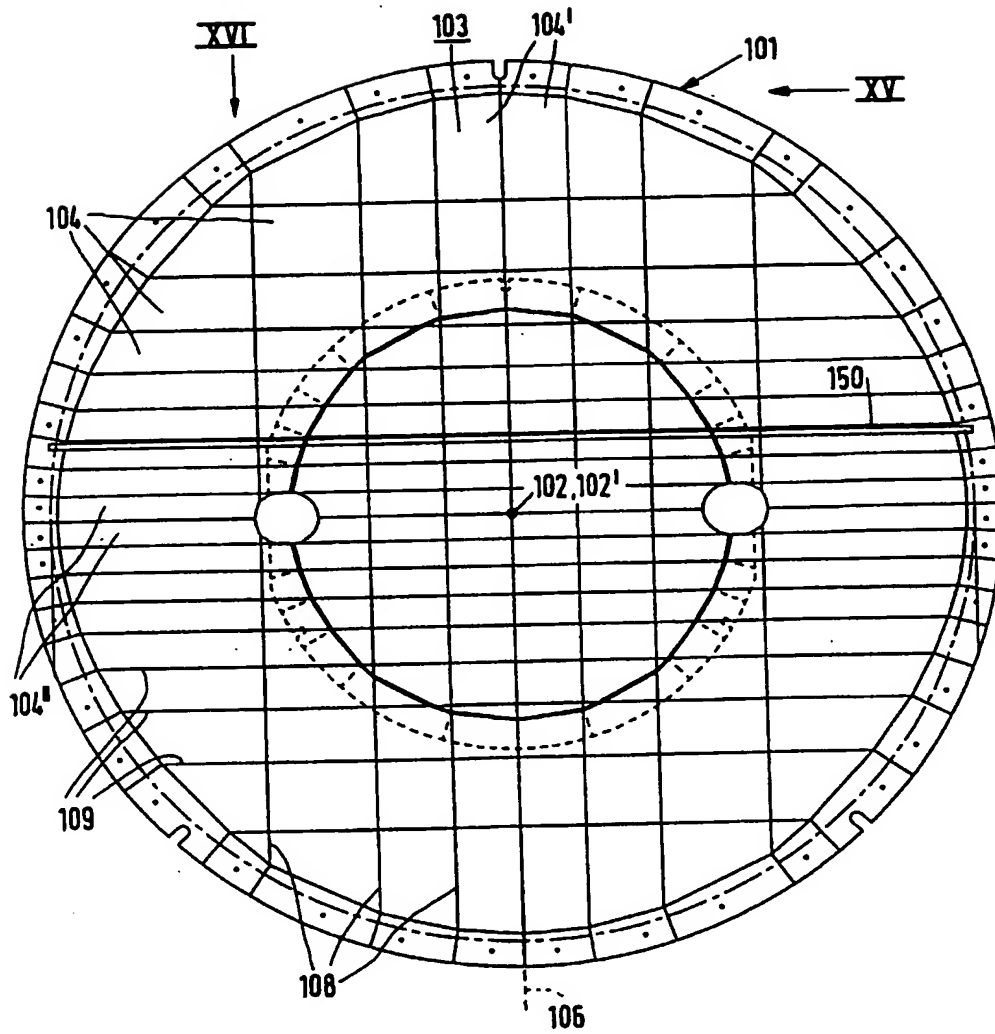


FIG. 14

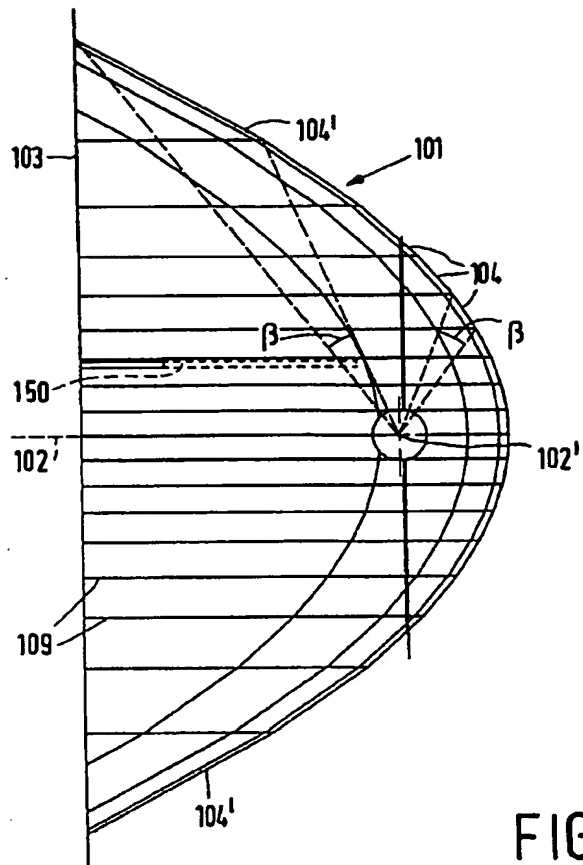


FIG.15

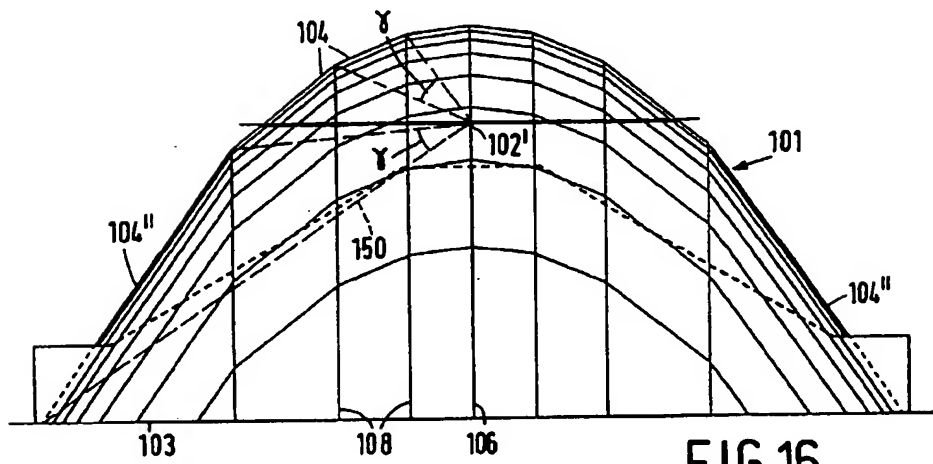


FIG.16

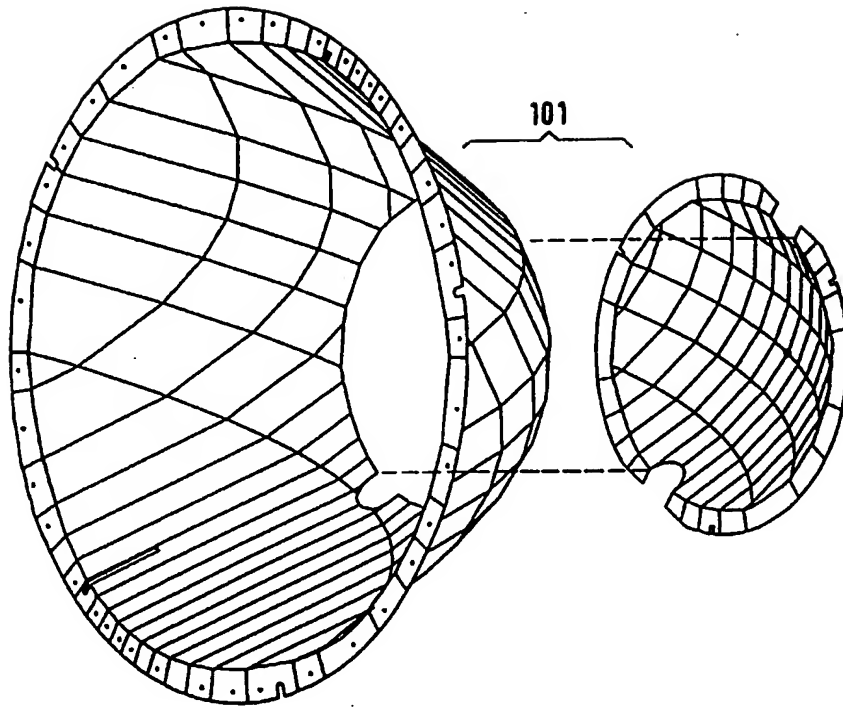


FIG.17

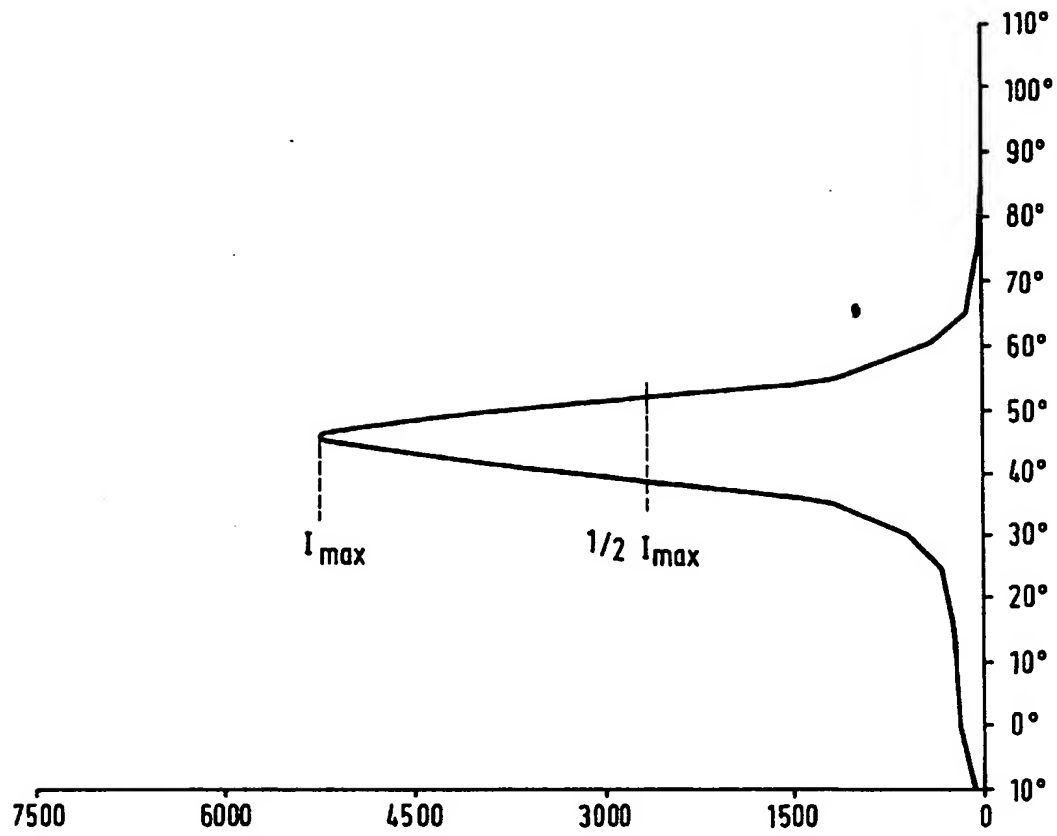


FIG. 18

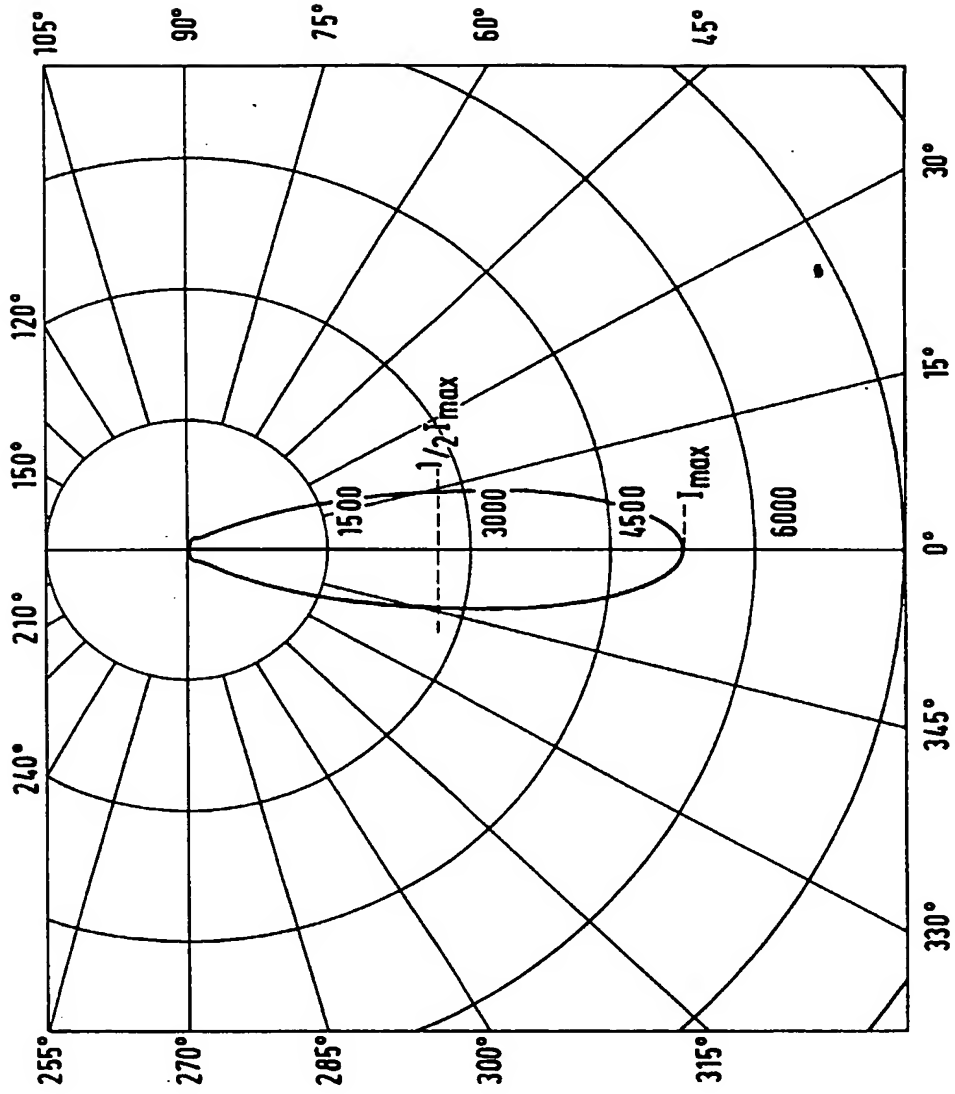


FIG. 19



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☒ FADED TEXT OR DRAWING

☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☐ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**